

# Forest-Clean Room®

**Technical board** composed of an isolating material core (see versions), covered in both sides with high pressure lamination or PRFV/GRP.  
It enables to manufacture light boards, highly isolating and perfectly finished in 2 sides.

## Gluing

Class III (EN 314-2)

## Variations

### Cores


- PUR / PIR
- EPS
- XPS
- Rock wool
- Honeycomb (PP, ALU, NOMEX)
- PET

### Covering

- Compact (Any manufacturer)
- PRFV/GRP
- Anodized aluminium / lacquer

## Main uses

Manufacture of modular constructions  
Cold rooms  
Clean rooms

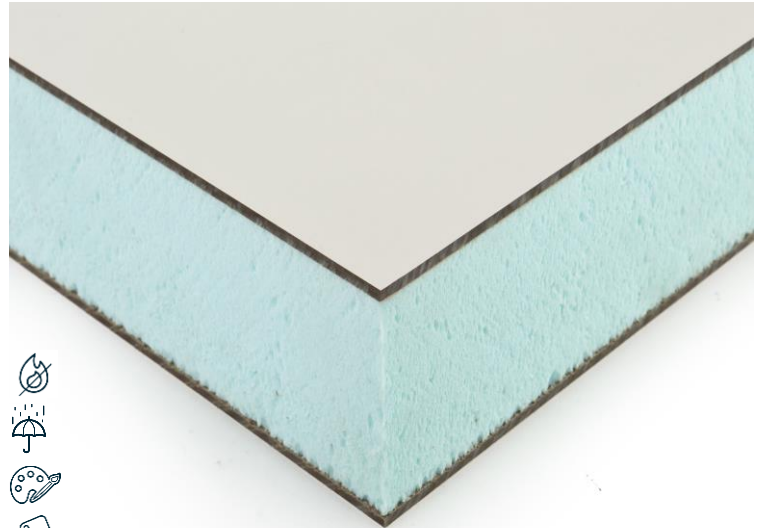

## Thickness (mm)

From 18 until 125

## Dimensions (mm)

From 2440 \*1220 until 3000\*1500 (Compact)  
From 2440 \* 1220 until 7000\*3000 (PRFV/GRP)  
From 2440 \* 1220 until 7000\*2000 (Anodized aluminium/lacquer)